



INSTALLATION SHEET

RADIANT HEATING IN A CONCRETE FLOOR:
R-3.8 with Ultra CBF 1620 Series or R-1.1 with 4320 / 4620 Series


- DIRECTS HEAT UP - TOWARDS THE LIVING SPACE
- INCREASES EFFICIENCY OF RADIANT HEATING SYSTEMS
- EXCELLENT VAPOR AND RADON BARRIER
- QUICK AND EASY TO INSTALL - REDUCES LABOUR COSTS

Available at: 888-470-2757
PEXHEAT.COM

INSTALLATION APPLICATION

INSTALLATION METHOD

1. Unroll rFOIL™ insulation onto floor (clear poly side up, if applicable).
2. Butt the seams and seal all joints with rFOIL™ white poly tape.
3. Install radiant heating system as per manufacturer's instructions.
4. Proceed with concrete pour as usual - ensuring a thickness of at least 3".

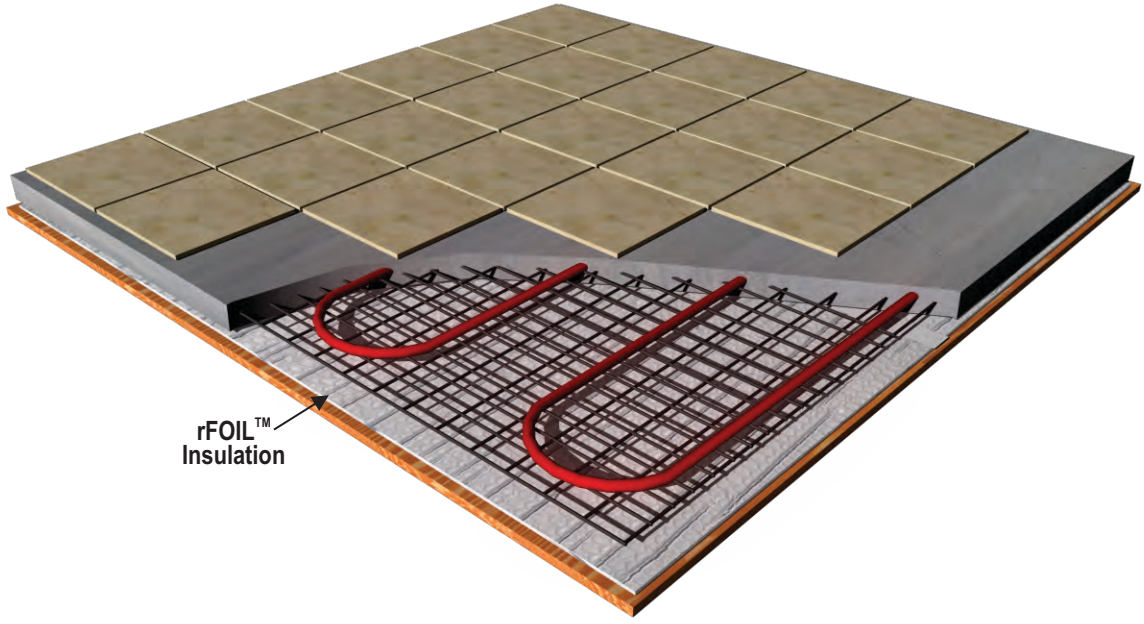

rFOIL™ Insulation

SUGGESTED PRODUCTS FOR THIS APPLICATION:

rFOIL™ INSULATION PRODUCT	1620, 4320 or 4620 Series (Available in Various Dimensions)
rFOIL™ TAPE	15853 or 15582 (White Poly)

- a) Check local building codes for compliance before installation. This installation sheet is intended solely to illustrate the proper location and placement of rFOIL™ Reflective Insulation products in specific constructions applications. They are not intended to illustrate proper construction methods (which is ultimately the responsibility of the builder or contractor). The installation instructions are only recommendations relating to the location and placement of rFOIL™ Reflective Insulation products and rFOIL™ makes no claims that these construction systems are universally accurate.
- b) All warranties are void if rFOIL™ Reflective Insulation products are used in exterior applications, or in non-enclosed systems or buildings.
- c) Exercise caution when using rFOIL™ Reflective Insulation products near and around electrical wiring and devices.



279 Humberline Drive Etobicoke, ON M9W 5T6
 Call Toll Free: 1-800-837-8961 Local: 416-798-1340
 Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com



Published: June 30, 2013