



Accessories


**C 005**

01/11

Replaces: New

Job \_\_\_\_\_ Designer Brian Whitehurst Contact Pexheat.com

The 0 – 135 Ω Converter 005 is designed to convert a 4 - 20 mA modulating signal from a control to a 0 – 135 Ω resistance signal. It can be used in applications where a modulating boiler control is used to operate a modulating boiler that requires a 0 – 135 Ω signal.

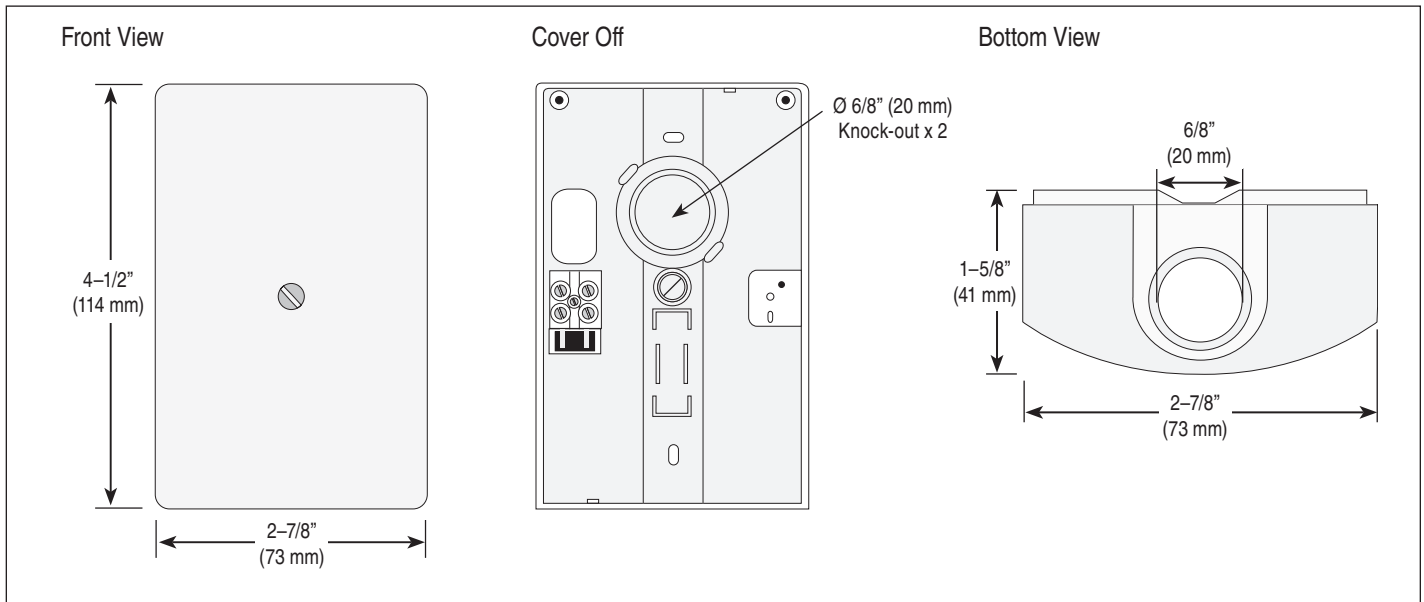

**Specifications**

<b>0 – 135 Ω Converter 005</b>	
Literature	D005
Packaged weight	0.4 lb (180 g)
Dimensions	4-1/2" H x 2-7/8" W x 1-1/2" D (73 x 114 x 38 mm)
Enclosure	Glass reinforced modified PET, NEMA type 2
Approvals	CSA C US, meets class B: ICES & FCC Part 15
Ambient conditions	Indoor use only, 32 to 122°F (0 to 50°C), RH ≤90% Non-condensing, Altitude <6560 ft. (2000 m), Installation Category II, Pollution Degree 2
Warranty	Limited 3 Year (See D005 for full warranty)

**Features**

- Converts 4-20 mA signal to 0 - 135 Ω signal

**SPECIAL REQUIREMENTS**

N / A

